

## Fully Integrate into High-Speed, Multi-channel Measurement Systems

### Multi-channel

Up to 32 + 22 channels (MR8740)

The MR8740 uses a two-block internal architecture, essentially giving it the capabilities of two MEMORY HiCORDERs.

Up to 16 channels (MR8741)

### High-speed isolated measurement

20 MS/s isolated sampling

Simultaneous 20M sampling within the same block

### DVM UNIT MR8990

Digital Voltage Meter

Measure minute changes in voltage at a high level of precision. Simultaneous measurement of all channels--rather than scanner-type measurement--dramatically reduces cycle times.

### Systems Integration

Ideal for rack-mounting


Height of 4U (180 mm) or less  
MR8740: 177 (H) × 426 (W) mm  
MR8741: 160 (H) × 350 (W) mm

# Are you having problems with multi-channel measurement or testing?

“We’re using multiple DMM units with a scanner to switch inputs. Measurement takes too long...”  
**Reduced cycle times**

“We need to perform many different types of measurements on a large number of channels.”  
**Measure across multiple channels at the same time**

“We’re using multiple measuring instruments, and it’s hard to control them all. The wiring is a mess...”  
**Simplified systems**

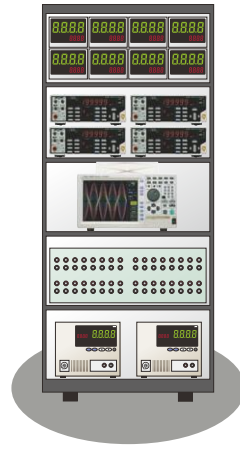

“We can’t embed our oscilloscope, so we use it on a shelf. Our setup would be a lot sleeker if we could fit it in.”  
**Rack-mountable design**

“Tall, large racks are dangerous in a production setting. I wonder if our setup can be made smaller...”  
**Space-saving design**

“I wish we could make measurements faster and at a higher level of precision.”  
**High-speed, high-precision performance**



## Solve these issues with the MR8740/MR8741 Memory HiCorder.

A single-instrument solution for measuring multiple signal types and channels featuring rack-style measurement units that can be selected freely according to the target application

### High precision and high resolution


#### DIGITAL VOLTAGE METER DVM UNIT MR8990



The MR8990 can measure even minute voltages previously measured with a DMM. The MR8990 can capture minute voltage fluctuations as waveforms.

### Features

- High resolution: 24bit, 6.5-digit display**  
Thanks to a resolution of 0.1µV, the MR8990 can measure even minute fluctuations in the output voltage of sensors and other equipment.
- High accuracy: ±0.01% rdg. ±0.0025 % f.s.**  
The MR8990 performs measurements at a high precision of ±0.01% rdg. ±0.0025% f.s. and at speeds of up to 500 samples per second.
- Max. allowable input: DC 500 V**  
The MR8990 can accommodate input ranging from minute to high voltages.
- High input resistance**  
5mV/DIV to 500mV/DIV range: 100 MΩ or greater  
5V/DIV to 50V/DIV range : 10 MΩ ±5%

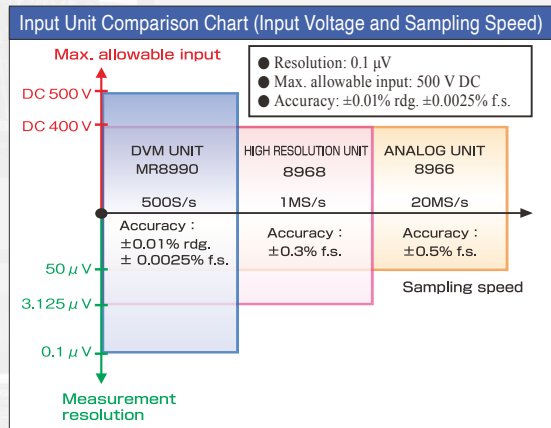

### Extensive selection of Measurement or Output units

Thanks to a unit-based architecture that can accommodate voltage, current, temperature, frequency, distortion, measurement, and waveform output, the MR8740/MR8741 is a single-instrument solution for measuring multiple parameters. As a bonus, the ability to simultaneously record different signals on multiple channels cuts down on measurement times.


### Ideal for rack-mounting

The MR8740/MR8741 ship standard with EIA standard-compliant rack-mounting hardware. The instruments also support JIS standard racks. Please contact HIOKI for more information.

The MR8740 is a rack-mountable instrument that can measure up to (32 + 22) channels. It uses a two-block architecture (32ch + 22ch), essentially giving it the capabilities of two Memory HiCorders.


# MR8740 32ch + 22ch model

- Accommodates up to 27 measurement units.
- Two-block architecture (Block I: 16 units; block II: 11 units)
- Standard support for 16 logic channels

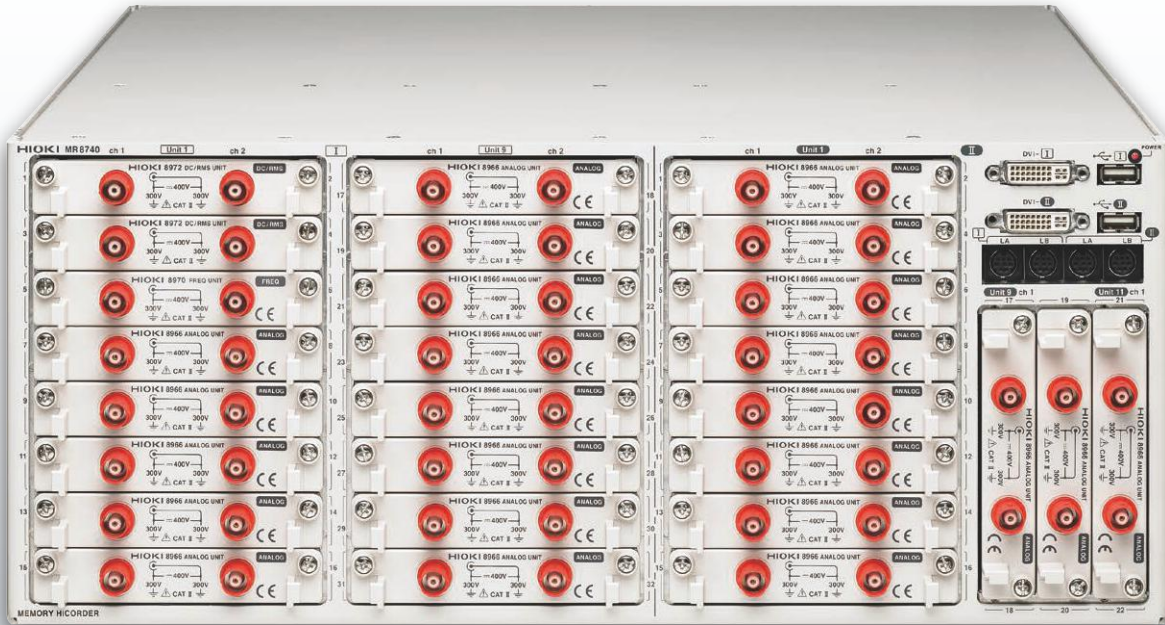

Support for multi-channel measurement of up to 54 channels. Switchable inter-block trigger synchronization

Independent block operation. Support for applications using different functions

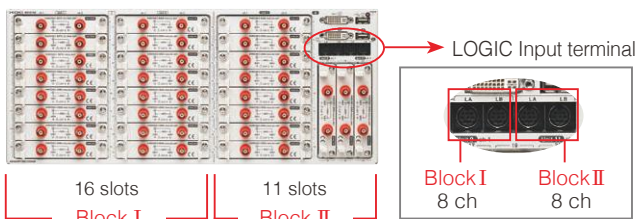

Block I : Analog 32ch, Logic 8ch  
Block II : Analog 22ch, Logic 8ch

(There may be a lag of up to 1 μs or 3 samples between blocks I and II.)

Since blocks I (32 channels) and II (22 channels) perform measurements independently, it is possible to set different function and sampling speeds for each block. Operations such as starting measurement are performed separately by each block, and different measurement data files are used by each block.

For example...

Block I : MEMORY function, 20MS/s  
Block II : FFT function, 20MS/s

A single instrument supports a variety of measurements, expanding the range of applications in which the device can be used.

## Example: Multi-channel DMM (DC V only)



By switching from a bench-type DMM to a DVM unit, you can cut down on the amount of space taken up by measuring instruments. With no need to control multiple instruments, you can also simplify your system.




[Rear] LAN (100BASE-TX) and USB (type A, for USB flash memory or a mouse) connectors are standard on the rear of the instrument. The power inlet and power switch are also located here.

The MR8741 is a bench-top instrument that delivers affordable measurement performance. It features area judgment functionality and external control terminals.


# MR8741 16ch model

- Accommodates up to 8 measurement units.
- Standard support for 16 logic channels
- Area judgment function and external control terminals

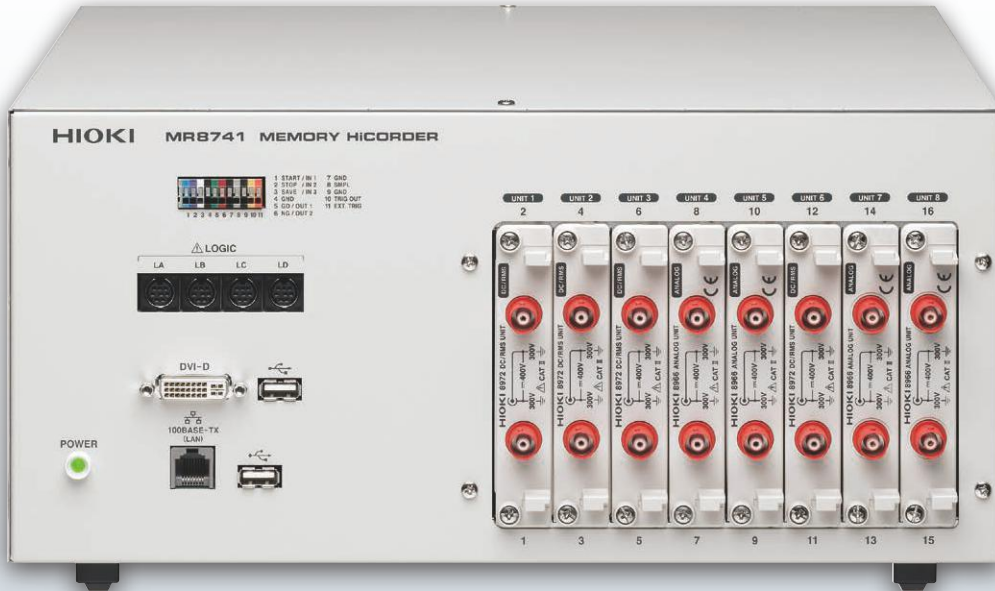

[Rear] A vent (fan), power inlet, and power switch are located on the rear of the instrument.

[Front panel]

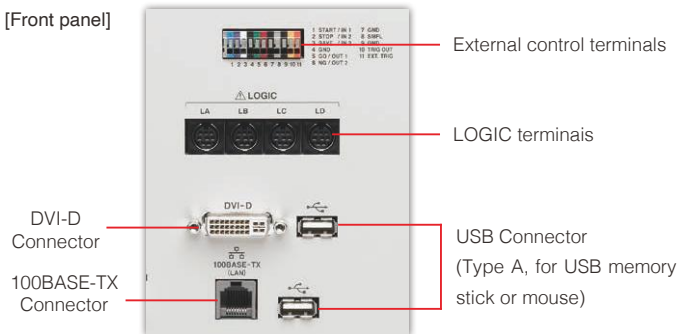


## Use as a multi-channel WAVE COMPARATOR.

### High-speed waveform judgment function

The MR8741's waveform judgment function, which monitors whether a target waveform has diverged from an area with a safe margin, makes it easy to measure signal waveforms for which it can otherwise be difficult to make pass/fail judgments. The instrument can measure waveforms on multiple channels at the high speed of 20 MS/s, providing immediate pass/fail judgments in maintenance and production line applications.

When using a time-axis range slower than 100msec/div, measured waveforms can be compared in near real-time, enabling you to detect failures on the spot. Production can be halted in time to minimize resource waste.

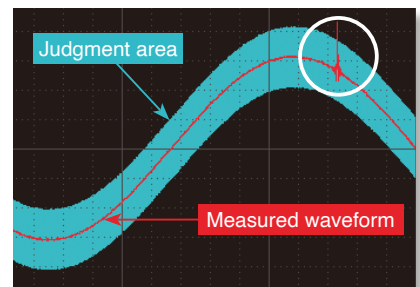

Compare captured waveform with reference area

Setting the waveform evaluation	[OUT] Return NG if any part of the waveform leaves the evaluation area. [ALL OUT] Return NG if the entire waveform leaves the evaluation area.
Setting the GO/NG stop mode	[GO] Stop recording on GO result. [NG] Stop recording on NG result. [GO] Stop recording on GO or NG result.


# Convenient functions

## Display and mouse connectivity

Measure without using a PC.


By connecting a display and mouse to the MR8740/MR8741, you can display waveforms and operate the instrument with a mouse.

The monitor display screen uses the same layout as the MR8847 Memory HiCorder series display. A mouse can be used to operate and configure the instrument, providing a user experience that approximates use of a keyboard. (Display and mouse not included.)

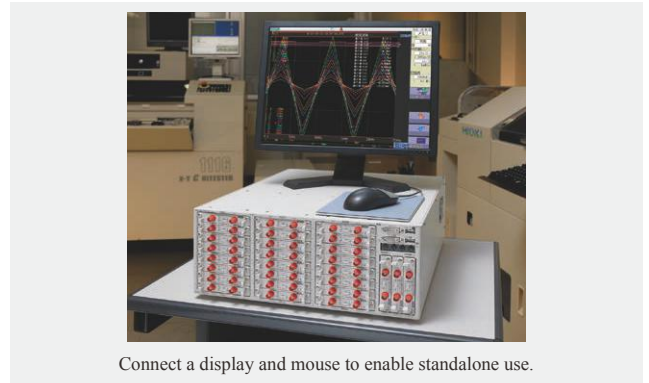

Connect a display and mouse to enable standalone use.

## X-Y wave comparator MR8741 only

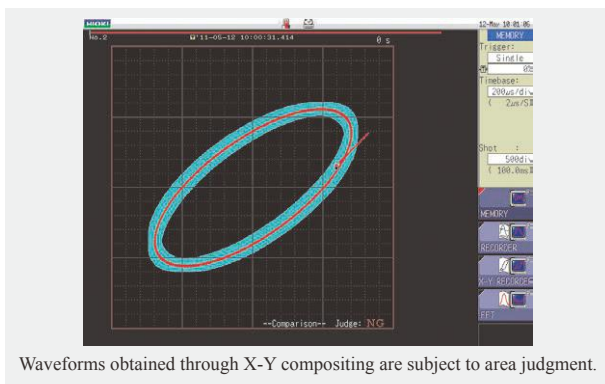


Waveforms obtained through X-Y compositing are subject to area judgment.

The MR8741 includes functionality for judging X-Y waveforms. Waveforms measured using the memory function and created with X-Y compositing are subject to area judgment.

The X-Y waveforms captured from these and many other applications can be tested against reference waveforms automatically:

- Alteration and pressure at press machines
- Pump pressure and flow

## Value monitor (DMM display)

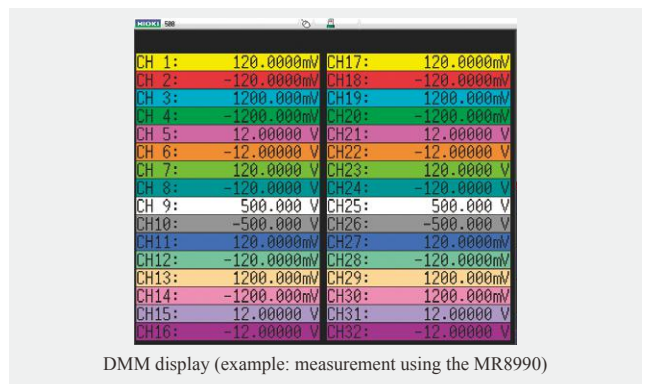

DMM display (example: measurement using the MR8990)


Input values can be monitored numerically in the manner of a digital multimeter (DMM).

## Numerical calculation function

Calculate parameter values from measured waveform

20 different built-in calculation types including effective (rms) value, peak value, and maximum value.



Multiple channels can be measured and judged at once, minimizing cycle times. Inter-channel calculations can also be performed at high speed by means of internal processing, and the results can be transferred to a computer.

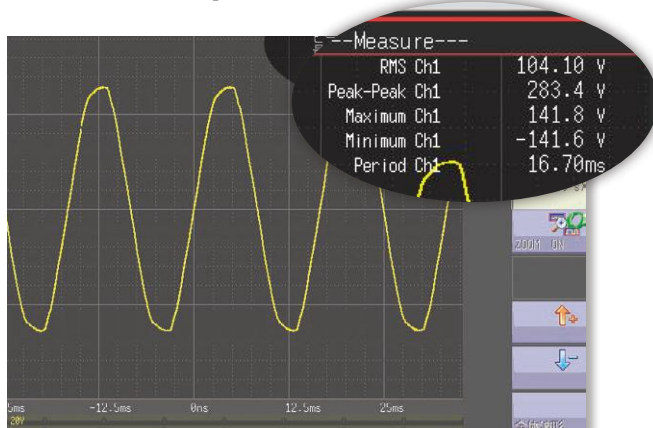

Numerical calculation results can be shown on waveform display

**Numerical calculation settings**

**Evaluation settings**



# Signal Input and Output

The right module for your measurement needs

## Inverter / UPS Test

- Operation testing and evaluation during load fluctuation
- Confirmation of UPS switching

Recommended units	ANALOG UNIT 8966
	LOGIC UNIT 8973
	CURRENT UNIT 8971

Perfect for inverter and UPS evaluation / start-up tests. Record using both logic (control signals) and analog (primary/secondary voltage or current for a UPS or inverter).



UPS




Inverter

## Power Monitor and Logger

- Identify power fluctuations when power supply is turned ON/OFF and during load fluctuations
- Long-term fluctuations in power

Recommended units	ANALOG UNIT 8966
	HIGH RESOLUTION UNIT 8968
	FREQ UNIT 8970

Load the analog output for the rms (instant power / voltage / current, etc.) calculated by the power analyzer, or import the waveform output from the power analyzer to observe data for long-term tests or irregular waveforms.

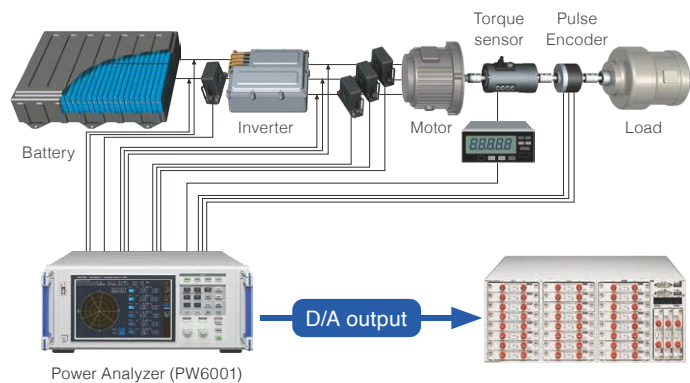

Power Analyzer (PW6001)

## Control Simulation

- Generate simulated output of each type of sensor signal
- Fluctuating simulated output for 12 V DC car batteries

Recommended units	ARBITRARY WAVEFORM GENERATOR UNIT U8793
	WAVEFORM GENERATOR UNIT MR8790
	PULSE GENERATOR UNIT MR8791

Use actual waveforms to perform testing on control boards, such as for engine control, airbags, brake systems, power steering, and active suspension. This allows efficient simulation of actual waveforms obtained from cars.



Perfect for control testing of automobiles, high speed trains, and traditional trains


Vibration	Generation	Voltage	DC voltage	Generation	Pulse	Voltage
CHARGE UNIT U8979	ARBITRARY WAVEFORM GENERATOR UNIT U8793	HIGH VOLTAGE UNIT U8974	DIGITAL VOLTMETER UNIT MR8990	WAVEFORM GENERATOR UNIT MR8790	PULSE GENERATOR UNIT MR8791	ANALOG UNIT 8966
16-bit measurement resolution Vibration and acceleration	No. of channels: 2 Arbitrary waveform output	Measurement resolution: 16-bit 1/1600 of measurement range	Measurement resolution: 24-bit 1/50 000 of measurement range	No. of channels: 4 Waveform output	No. of channels: 8 Pulse output	Measurement resolution: 12-bit 20 MS/s high-speed sampling
• Charge output sensor • Sensor with built-in pre-amp • TEDS-compatible	• Output frequency range 10m Hz to 100 kHz • Max. output: 15 V	• High voltage • Commercial power supply (primary/secondary) • Power equipment characteristics testing	• Multi-channel • Minute sensor voltage • EV battery voltage	• DC output: -10 V to 10 V • Sine wave output 1 Hz to 20 kHz	• Pulse output 0.1 Hz to 20 kHz • Pattern output	• Various amps • Transducers • Sensors • Industrial meters

# Abundant modules

Hioki has added new high-performance modules in response to overwhelming demand.



The Memory HiCorder now supports a wide variety of measurements.

- CHARGE UNIT U8979 ▶
- STRAIN UNIT U8969 ▶
- ARBITRARY WAVEFORM GENERATOR UNIT U8793 ▶
- HIGH VOLTAGE UNIT U8974 ▶
- WAVEFORM GENERATOR UNIT MR8790 ▶
- PULSE GENERATOR UNIT MR8791 ▶
- DIGITAL VOLTMETER UNIT MR8990 ▶

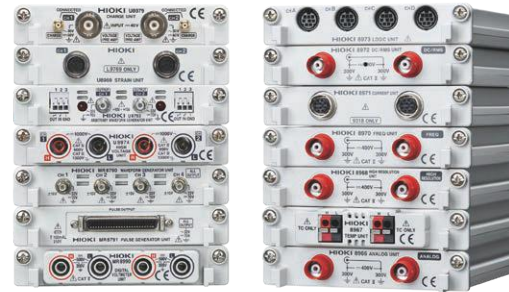

# Output and record results seamlessly

Just one MEMORY HiCORDER gives you a function generator mode, arbitrary waveform generator mode, and waveform measurement mode. This makes it easy to observe waveforms while varying test conditions, such as changing the signal's amplitude and frequency and programming various waveforms to output in order.




Standalone testing

## Output recorded waveforms without modification

For example, you could output actual waveforms recorded from a car without modification, and then use them for standalone testing. You can also generate isolated output of up to 15 V without a generator or amplifier, which is traditionally necessary in order to generate output while varying the signal's amplitude and frequency.




Max. 15 V output



## Process actual waveforms for reproducibility testing

Process and calculate signals recorded with the MEMORY HiCORDER and output the arbitrary waveforms that you create.




Output waveform example



Reproducibility testing


## Waveform Maker Software included

After you install the included SF8000 Waveform Maker software on your computer, you can create waveforms easily by either entering them directly or by entering the functions behind them. You can also quickly add noise and multiply waveforms.

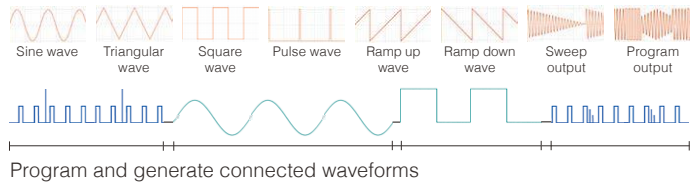

# 1000 V DC, 700 V AC high-voltage direct input

Since you can directly input up to 1000 V DC and 700 V AC, a differential probe is no longer necessary. Maximum rated voltage to ground is 1000 V for CAT III and 600 V for CAT IV environments.

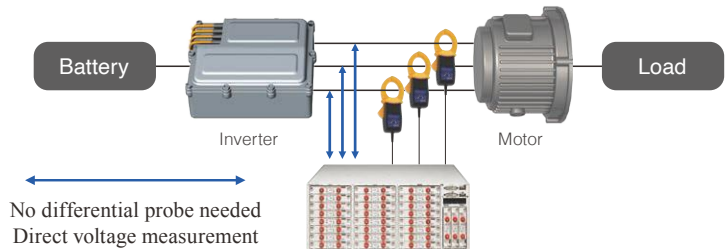

Temperature	Voltage	Distortion	Frequency, RPM	Current	Voltage	Contact
TEMP UNIT 8967	HIGH RESOLUTION UNIT 8968	STRAIN UNIT U8969	FREQ UNIT 8970	CURRENT UNIT 8971	DC/RMS UNIT 8972	LOGIC UNIT 8973
Measurement resolution: 16-bit 1/1000 of measurement range	Measurement resolution: 16-bit 1/1600 of measurement range	Measurement resolution: 16-bit 1/1250 of measurement range	Measurement resolution: 16-bit 1/2000 of measurement range	Measurement resolution: 12-bit Clamp sensor direct connection	Measurement resolution: 12-bit RMS measurement	No. of channels: 16 Observation of control signal
• Thermocouple K, J, E, T, N, R, S, B, W	• Supply voltage • Primary / secondary inverter voltage • Motor voltage, etc.	• Strain gauge converter • Dynamic strain • Vibration • Pressure • Acceleration • Weight, etc.	• Encoder • Rotating pulse	• Supply current • Inverter current • Motor current, etc.	• Supply voltage • Primary / secondary inverter voltage • Motor voltage, etc.	• Voltage / non-voltage contacts • Relay signals • AC / DC signals

## Optional Specifications (sold separately)

Dimensions and mass: approx. 106 mm (4.17 in) W × 19.8 mm (0.78 in) H × 196.5 mm (7.74 in) D, approx. 250 g (8.8 oz)  
Accessories: None



<b>ANALOG UNIT 8966</b> (Accuracy at 23 ±5°C/73 ±9°F, 20 to 80% rh after 30 minutes of warm-up time and zero adjustment; Accuracy guaranteed for 1 year)	
Measurement functions	Number of channels: 2, for voltage measurement
Input terminals	Isolated BNC connector (input impedance 1 MΩ, input capacitance 30 pF), Max. rated voltage to ground: 300 V AC or DC (with input isolated from the main unit, the maximum voltage that can be applied between input channel and chassis, and between input channels without damage)
Measurement range	5 mV to 20 V/div, 12 ranges, full scale: 20 div, AC voltage for possible measurement/display using the memory function: 280 V rms, Low-pass filter: 5/50/500 Hz, 5 k/50 k/500 kHz
Measurement resolution	1/100 of range (using 12-bit A/D conversion)
Maximum sampling rate	20 MS/s (simultaneous sampling in 2 channels)
Measurement accuracy	±0.5% of full scale (with filter 5 Hz, zero position accuracy included)
Frequency characteristics	DC to 5 MHz -3 dB, (with AC coupling: 7 Hz to 5 MHz -3 dB)
Input coupling	AC/DC/GND
Maximum input voltage	400 V DC (maximum voltage that can be applied between input connectors without damage)

Dimensions and mass: approx. 106 mm (4.17 in) W × 19.8 mm (0.78 in) H × 204.5 mm (8.05 in) D, approx. 240 g (8.5 oz)  
Accessories: Ferrite clamp × 2



<b>TEMP UNIT 8967</b> (Accuracy at 23 ±5°C/73 ±9°F, 20 to 80% rh after 30 minutes of warm-up time and zero adjustment; Accuracy guaranteed for 1 year)	
Measurement functions	Number of channels: 2, for temperature measurement with thermocouple (voltage measurement not available)
Input terminals	Thermocouple input: plug-in connector, Recommended wire diameter: single-wire, 0.14 to 1.5 mm <sup>2</sup> , braided wire 0.14 to 1.0 mm <sup>2</sup> (conductor wire diameter min. 0.18 mm), AWG 26 to 16 Input impedance: min. 5 MΩ (with line fault detection ON/OFF), Max. rated voltage to ground: 300 V AC or DC (with input isolated from the main unit, the maximum voltage that can be applied between input channel and chassis, and between input channels without damage)
Temperature measurement range	10°C (50°F)/div (-100°C to 200°C (-148°F to 392°F)), 50°C (122°F)/div (-200°C to 1000°C (-328°F to 1832°F)), 100°C (212°F)/div (-200°C to 2000°C (-328°F to 3632°F)), 3 ranges, full scale: 20 div, Measurement resolution: 1/1000 of measurement range (using 16-bit A/D conversion)
Thermocouple range (JIS C 1602-1995) (ASTM E-988-96)	K: -200°C to 1350°C (-328°F to 2462°F), J: -200°C to 1100°C (-328°F to 2012°F), E: -200°C to 800°C (-328°F to 1472°F), T: -200°C to 400°C (-328°F to 752°F), N: -200°C to 1300°C (-328°F to 2372°F), R: 0°C to 1700°C (32°F to 3092°F), S: 0°C to 1700°C (32°F to 3092°F), B: 400°C to 1800°C (752°F to 3272°F), W (WRε5-26): 0°C to 2000°C (32°F to 3632°F), Reference junction compensation: internal/ external (switchable), Line fault detection ON/OFF possible
Data refresh rate	3 methods, Fast: 1.2 ms (digital filter OFF), Normal: 100 ms (digital filter 50/60 Hz), Slow: 500 ms (digital filter 10 Hz)
Measurement accuracy	Thermocouple K, J, E, T, N: ±0.1% of full scale ±1°C (±1.8°F) (±0.1% of full scale ±2°C (±3.6°F) at -200°C to 0°C (-328°F to 32°F)) Thermocouple R, S, B, W: ±0.1% of full scale ±3.5°C (±6.3°F) (at 0°C (32°F) to less than 400°C (752°F); However, no accuracy guarantee of less than 400°C (752°F) for B), ±0.1% f.s. ±3°C (±5.4°F) (at 400°C (752°F) or more) Reference junction compensation accuracy: ±1.5°C (±2.7°F) (added to measurement accuracy with internal reference junction compensation)

Dimensions and mass: approx. 106 mm (4.17 in) W × 19.8 mm (0.78 in) H × 196.5 mm (7.74 in) D, approx. 250 g (8.8 oz)  
Accessories: None



<b>HIGH RESOLUTION UNIT 8968</b> (Accuracy at 23 ±5°C/73 ±9°F, 20 to 80% rh after 30 minutes of warm-up time and zero adjustment; Accuracy guaranteed for 1 year)	
Measurement functions	Number of channels: 2, for voltage measurement
Input terminals	Isolated BNC connector (input impedance 1 MΩ, input capacitance 30 pF), Max. rated voltage to ground: 300 V AC, DC (with input isolated from the unit, the maximum voltage that can be applied between input channel and chassis and between input channels without damage)
Measurement range	5 mV to 20 V/div, 12 ranges, full scale: 20 div, AC voltage for possible measurement/display using the memory function: 280 V rms, Low-pass filter: 5/50/500 Hz, 5k/50k Hz
Anti-aliasing filter	Integrated filter for suppressing aliasing distortion caused by FFT processing (automatic cutoff frequency setting/OFF)
Measurement resolution	1/1600 of measurement range (using 16-bit A/D conversion)
Maximum sampling rate	1 MS/s (simultaneous sampling in 2 channels)
Measurement accuracy	±0.3% of full scale (with filter 5 Hz, zero position accuracy included)
Frequency characteristics	DC to 100 kHz -3 dB (with AC coupling: 7 Hz to 100 kHz -3 dB)
Input coupling	AC/DC/GND
Maximum input voltage	400 V DC (maximum voltage that can be applied between input connectors without damage)

Dimensions and mass: approx. 106 mm (4.17 in) W × 19.8 mm (0.78 in) H × 196.5 mm (7.74 in) D, approx. 245 g (8.6 oz)  
Accessories: Conversion cable L9769 × 2 (cable length 60 cm/1.97 ft)



<b>STRAIN UNIT U8969</b> (Accuracy at 23 ±5°C/73 ±9°F, 80% rh or less, after 30 minutes of warm-up time and auto-balance; Accuracy guaranteed for 1 year)	
Measurement functions	Number of channels: 2, for distortion measurement (electronic auto-balancing, balance adjustment range within ±10 000 με or less)
Input terminals	NDIS connector EPRC07-R9FNDIS (via Conversion Cable L9769, NDIS connector PRC03-12A10-7M10.5) Max. rated voltage to ground: 30 V rms or 60 V DC (with input isolated from the unit, the maximum voltage that can be applied between input channel and chassis and between input channels without damage)
Suitable transducer	Strain gauge converter, Bridge impedance: 120 Ω to 1 kΩ, Bridge voltage: 2 V ±0.05 V, Gauge rate: 2.0
Measurement range	20 με to 1000 με/div, 6 ranges, full scale: 20 div, Low-pass filter: 5/10/100 Hz, 1 kHz
Measurement resolution	1/1250 of measurement range (using 16-bit A/D conversion)
Maximum sampling rate	200 kS/s (simultaneous sampling across 2 channels)
Measurement accuracy After auto-balancing	±0.5% f.s. ±4 με (5 Hz filter ON)
Frequency characteristics	DC to 20 kHz +1/-3 dB

Dimensions and mass: approx. 106 mm (4.17 in) W × 19.8 mm (0.78 in) H × 196.5 mm (7.74 in) D, approx. 250 g (8.8 oz)  
Accessories: None



<b>FREQ UNIT 8970</b> (Accuracy at 23 ±5°C/73 ±9°F, 20 to 80% rh after 30 minutes of warm-up time; Accuracy guaranteed for 1 year)	
Measurement functions	Number of channels: 2, for voltage input based frequency measurement, rotation, power frequency, integration, pulse duty ratio, pulse width
Input terminals	Isolated BNC connector (input impedance 1 MΩ, input capacitance 30 pF), Max. rated voltage to ground: 300 V AC or DC (with input isolated from the main unit, the maximum voltage that can be applied between input channel and chassis, and between input channels without damage)
Frequency mode	Range: Between DC to 100 kHz (minimum pulse width 2 μs), 1 Hz/div to 5 kHz/div (full scale = 20 div), 8 settings Accuracy: ±0.1% f.s. (exclude 5 kHz/div), ±0.7% f.s. (at 5 kHz/div)
Rotation mode	Range: Between 0 to 2 million rotations/minute (minimum pulse width 2 μs), 100 (r/min)/div to 100 k (r/min)/div (full scale = 20 div), 7 settings Accuracy: ±0.1% f.s. (excluding 100 k (r/min)/div), ±0.7% f.s. (at 100 k (r/min)/div)
Power frequency mode	Range: 50 Hz (40 to 60 Hz), 60 Hz (50 to 70 Hz), 400 Hz (390 to 410 Hz) (full scale = 20 div), 3 settings Accuracy: ±0.03 Hz (50, 60 Hz), ±0.1 Hz (400 Hz range)
Integration mode	Range: 2 k counts/div to 1 M counts/div, 6 settings Accuracy: ±range/2000
Duty ratio mode	Range: Between 10 Hz to 100 kHz (minimum pulse width 2 μs), 5%/div (full scale = 20 div) Accuracy: ±1% (10 Hz to 10 kHz), ±4% (10 kHz to 100 kHz)
Pulse width mode	Range: Between 2 μs to 2 sec, 500 μs/div to 100 ms/div (full scale = 20 div), Accuracy: ±0.1% f.s.
Measurement resolution	1/2000 of range (Integration mode), 1/500 of range (exclude integration, power frequency mode), 1/100 of range (power frequency mode)
Input voltage range and threshold level	±10 V to ±400 V, 6 settings, selectable threshold level at each range
Other functions	Slope, Level, Hold, Smoothing, Low-pass filter, Switchable DC/AC input coupling, Frequency dividing, Integration over-range keep/return

Dimensions and mass: approx. 106 mm (4.17 in) W × 19.8 mm (0.78 in) H × 196.5 mm (7.74 in) D, approx. 250 g (8.8 oz)  
Accessories: CONVERSION CABLE 9318 × 2  
(To connect the current sensor to the 8971)



<b>CURRENT UNIT 8971</b> (Accuracy at 23 ±5°C/73 ±9°F, 20 to 80% rh after 30 minutes of warm-up time and zero adjustment; Accuracy guaranteed for 1 year)	
Measurement functions	Number of channels: 2, Current measurement with optional current sensor,
Input terminals	Sensor connector (input impedance 1 MΩ, exclusive connector for current sensor via conversion cable the 9318, common GND with recorder)
Compatible current sensors and measurement range (f.s. = 20 div)	Using 9272-05 (20 A), CT6841A: 2 A / 4 A / 10 A / 20 A / 40 A / 100 A f.s. Using CT6862-05, CT6872: 4 A / 10 A / 20 A / 40 A / 100 A / 200 A f.s. Using 9272-05 (200 A), CT6843A, CT6863-05, CT6873: 20 A / 40 A / 100 A / 200 A / 400 A / 1000 A f.s. Using CT6844A, CT6845A, CT6846A, CT6875A, CT6876A: 40 A / 100 A / 200 A / 400 A / 1000 A / 2000 A f.s. How to connect to 8971: use Conversion Cable 9318 + Conversion Cable CT9901 *The measurable range is limited by the connected sensor(s). Please check your current sensors' specifications.
Measurement accuracy (with 5 Hz filter ON)	±0.65% f.s. RMS amplitude accuracy: ±1% f.s. (DC, 30 Hz to 1 kHz), ±3% f.s. (1 kHz to 10 kHz) RMS response time: 100 ms (rise time from 0 to 90% of full scale), Crest factor: 2 Frequency characteristics: DC to 100 kHz, ±3 dB (with AC coupling: 7 Hz to 100 kHz)
Measurement resolution	1/100 of range (using 12-bit A/D conversion)
Maximum sampling rate	1 MS/s (simultaneous sampling in 2 channels)
Other functions	Input coupling: AC/DC/GND, Low-pass filter: 5, 50, 500, 5 k, 50 kHz

Dimensions and mass: approx. 106 mm (4.17 in) W × 19.8 mm (0.78 in) H × 196.5 mm (7.74 in) D, approx. 250 g (8.8 oz)  
Accessories: None



<b>DC/RMS UNIT 8972</b> (Accuracy at 23 ±5°C/73 ±9°F, 20 to 80% rh after 30 minutes of warm-up time and zero adjustment; Accuracy guaranteed for 1 year)	
Measurement functions	Number of channels: 2, for voltage measurement, DC/RMS selectable
Input terminals	Isolated BNC connector (input impedance 1 MΩ, input capacitance 30 pF), Max. rated voltage to ground: 300 V AC or DC (with input isolated from the main unit, the maximum voltage that can be applied between input channel and chassis, and between input channels without damage)
Measurement range	5 mV to 20 V/div, 12 ranges, full scale: 20 div, AC voltage for possible measurement/display using the memory function: 280 V rms, Low-pass filter: 5/50/500 Hz, 5 k/100 kHz
Measurement resolution	1/100 of range (using 12-bit A/D conversion)
Maximum sampling rate	1 MS/s (simultaneous sampling in 2 channels)
Measurement accuracy	±0.5% of full scale (with filter 5 Hz, zero position accuracy included)
RMS measurement	RMS amplitude accuracy: ±1% f.s. (DC, 30 Hz to 1 kHz), ±3% of full scale (1 kHz to 100 kHz) Response time: SLOW 5 s (rise time from 0 to 90% of full scale), MID 800 ms (rise time from 0 to 90% of full scale), FAST 100 ms (rise time from 0 to 90% of full scale), Crest factor: 2
Frequency characteristics	DC to 400 kHz -3 dB, (with AC coupling: 7 Hz to 400 kHz -3 dB)
Input coupling	AC/DC/GND
Maximum input voltage	400 V DC (maximum voltage that can be applied between input connectors without damage)

Dimensions and mass: approx. 106 mm (4.17 in) W × 19.8 mm (0.78 in) H × 196.5 mm (7.74 in) D, approx. 190 g (6.7 oz)  
Accessories: None



<b>LOGIC UNIT 8973</b>	
Measurement functions	Number of channels: 16 channels (4 ch/1 probe connector × 4 connectors)
Input terminals	Mini DIN connector (for HIOKI logic probes only), Compatible logic probes: 9320-01, 9327, MR9321-01

Dimensions and mass: approx. 106 mm (4.17 in) W × 19.8 mm (0.78 in) H × 196.5 mm (7.74 in) D, approx. 230 g (8.1 oz)  
Accessories: None



HIGH-VOLTAGE UNIT U8974 <small>(Accuracy at 23 ±5°C/73 ±9°F, 20 to 80% rh after 30 minutes of warm-up time and zero adjustment; Accuracy guaranteed for 1 year)</small>	
Measurement functions	Number of channels: 2, for voltage measurement, DC/RMS selectable Maximum rated voltage to ground: 1000 V AC or DC (CAT III), 600 V AC or DC (CAT IV)
Input terminals	Banana input terminal (Input impedance: 4 MΩ, Input capacitance: 5 pF)
Measurement range	200 mV, 500 mV, 1, 2, 5, 10, 20, 50 V/div (DC mode) 500 mV, 1, 2, 5, 10, 20, 50 V/div (RMS mode)
Measurement resolution	1/1600 of measurement range (using 16-bit A/D conversion)
Maximum sampling rate	1 MS/s
Measurement accuracy	±0.25% f.s. (with filter 5 Hz, zero position accuracy included)
RMS measurement	RMS accuracy: ±1.5% f.s. (DC, 30 Hz to 1 kHz), ±3% f.s. (1 kHz to 100 kHz) Response time: High speed 150 ms, Medium speed 500 ms, Low speed 2.5 s
Frequency characteristics	DC to 100 kHz -3 dB
Input coupling	DC / GND
Maximum input voltage	1000 V DC, 700 V AC

Dimensions and weight: approx. 106 mm (4.17 in.) W × 19.8 mm (0.78 in.) H × 196.5 mm (7.74 in.) D, approx. 230 g (8.1 oz.)  
Accessories: None



CHARGE UNIT U8979 <small>(Accuracy at 23 ±5°C [73 ±9°F], 80% rh or less, after 30 minutes of warm-up time and zero adjustment; Accuracy guaranteed for 1 year)</small>	
Measurement functions	Number of channels: 2, for acceleration measurement
Input terminals	Voltage input, pre-amp embedded input: metal BNC connector (under voltage input: input impedance 1 MΩ, input capacitance 200 pF or less) Charge input: miniature connector (#10-32UNF) Max. rated voltage to ground: 30 V AC or 60 V DC (with input isolated from the main unit, the maximum voltage that can be applied between input channel and chassis, and between input channels without damage) *Voltage input terminal GND and charge input terminal GND for the same channel are shared
Suitable transducer	Charge output type acceleration detector Pre-amp embedded acceleration detector (IEPE type)
Measurement range	1 (m/s <sup>2</sup> ) to 200k (m/s <sup>2</sup> ) f.s., 12 ranges × 6 types Charge input sensitivity: 0.1 pC/(m/s <sup>2</sup> ) to 10 pC/(m/s <sup>2</sup> ) Pre-amp embedded sensor input sensitivity: 0.1 mV/(m/s <sup>2</sup> ) to 10 mV/(m/s <sup>2</sup> ) Amplitude accuracy: ±2% f.s., frequency characteristics: 1 (1.5) Hz to 50 kHz, -3 dB (charge input) Low-pass filter: 500 Hz, 5 kHz Pre-amp supply power: 3.5 mA ±20%, 22 V ±5% Maximum input charge: ±500 pC (6 ranges on high sensitivity side), 50,000 pC (6 ranges on low sensitivity side)
Measurement range	10 mV to 40 V f.s., 12 ranges, DC amplitude accuracy: ±0.5% f.s. Frequency characteristics: DC to 50 kHz, -3 dB (with DC coupling), 1 Hz to 50 kHz, -3 dB (with AC coupling) Low-pass filter: 5 Hz, 500 Hz, 5 kHz, input coupling: AC/DC/GND Maximum input voltage: 40 V DC
Measurement resolution	1/25,000 of measurement range (using 16-bit A/D conversion)
Maximum sampling rate	200 kS/s
Anti-aliasing filter	Integrated filter for suppressing aliasing distortion caused by FFT processing (automatic cutoff frequency setting/off)
TEDS	IEEE 1451.4 class 1 support (support for sensor information reading and automatic sensitivity setting)

Dimensions and mass: approx. 106 mm (4.17 in) W × 19.8 mm (0.78 in) H × 196.5 mm (7.74 in) D, approx. 260 g (9.2 oz)  
Accessories: None



DIGITAL VOLTMETER UNIT MR8990 <small>(Accuracy at 23 ±5°C/73 ±9°F, 20 to 80% rh after 30 minutes of warm-up time and calibration; Accuracy guaranteed for 1 year)</small>	
Measurement functions	Number of channels: 2, for DC voltage measurement
Input terminals	Banana input connectors (Input resistance: 100 MΩ or higher with 100 mV f.s. to 10 V f.s. range, otherwise 10 MΩ) Max. rated voltage to ground: 300 V AC or DC (with input isolated from the main unit, the maximum voltage that can be applied between input channel and chassis, and between input channels without damage)
Measurement range	100 mV f.s. (5 mV/div) to 1000 V f.s. (50 V/div), 5 ranges, full scale: 20 div
Measurement resolution	1/500 000 of measurement range (using 24 bit ΔΣ modulation A/D)
Integration time	20 ms ×NPLC (during 50 Hz), 16.67 ms ×NPLC (during 60 Hz)
Response time	2 ms ×2 integration time or less (rise - f.s. → + f.s., fall + f.s. → - f.s.)
Basic measurement accuracy	±0.01% rdg. ±0.0025% f.s. (at range of 1000 mV f.s.)
Maximum input voltage	500 V DC (maximum voltage that can be applied between input connectors without damage)

Dimensions and mass: approx. 106 mm (4.17 in) W × 19.8 mm (0.78 in) H × 196.5 mm (7.74 in) D, approx. 250 g (8.8 oz)  
Accessories: None



ARBITRARY WAVEFORM GENERATOR UNIT U8793 <small>(Accuracy at 23 ±5°C/73 ±9°F, 80% rh or less after 30 minutes or more of warm-up time; Power supply frequency range of installed MEMORY RECORDER at 50 Hz/60 Hz ±2 Hz; Accuracy guaranteed for 1 year)</small>	
Output terminal	Number of channels: 2, SMB terminal (Output impedance: 1 Ω or less) Max. rated voltage to ground: 30 V rms AC or 60 V DC
Output voltage range	-10 V to 15 V (Amplitude setting range: 0 V to 20 V p-p, Setting resolution: 1 mV)
Max. output current	10 mA (Allowable load resistance: 1.5 kΩ or more)
FG function	DC, Sine wave, Square wave, Pulse wave, Triangular wave, Ramp wave, Output frequency: 10 mHz to 100 kHz
Arbitrary waveform generator mode	Waveforms measured by MR8847A, etc., generated by Hioki Model 7075 or SF8000, CSV waveforms D/A refresh rate: 2 MHz (using 16-bit D/A)
Sweep function	Frequency, Amplitude, Offset, Duty (Pulse only)
Program function	Max. 128 steps (Number of loops for each step, Number of total loops)
Other	Self-test function (Voltage), External input/output control

Dimensions and mass: approx. 106 mm (4.17 in) W × 19.8 mm (0.78 in) H × 196.5 mm (7.74 in) D, approx. 230 g (8.1 oz)  
Accessories: None



WAVEFORM GENERATOR UNIT MR8790 <small>(Accuracy at 23 ±5°C/73 ±9°F, 80% rh after 30 minutes of warm-up time; Accuracy guaranteed for 1 year)</small>	
Output terminal	Number of channels: 4, SMB terminal (Output impedance: 1 Ω or less) Max. rated voltage to ground: 30 V rms AC or 60 V DC
Output voltage range	-10 V to 10 V (Amplitude setting range: 0 V to 20 V p-p, Setting resolution: 1 mV)
Max. output current	5 mA
Output function	DC, Sine wave (Output frequency range: 1 Hz to 20 kHz)
Accuracy	Amplitude accuracy: ±0.25% of setting ±2 mV p-p (1 Hz to 10 kHz) Offset accuracy: ±3 mV DC output accuracy: ±0.6 mV
Other	Self-test function (Voltage, Current)

Dimensions and mass: approx. 106 mm (4.17 in) W × 19.8 mm (0.78 in) H × 196.5 mm (7.74 in) D, approx. 230 g (8.1 oz)  
Accessories: None



PULSE GENERATOR UNIT MR8791 <small>(Accuracy at 23 ±5°C/73 ±9°F, 80% rh or less with no condensation; Accuracy guaranteed for 1 year)</small>	
Output terminal	Number of channels: 8, Connector: D-sub, half-pitch, 50-pin Max. rated voltage to ground: 30 V rms AC or 60 V DC (between unit and output channels) Logic output/Open collector output
Output mode 1	Pattern output: Read frequency: 10 Hz to 120 kHz, 2048 logic patterns Pulse output: Frequency 0.1 Hz to 20 kHz, Duty 0.1% to 99.9%
Output mode 2	Logic output: Output voltage level: 0 V to 5 V (H level: 3.8 V or more, L level: 0.8 V or less) Open collector output: Absolute maximum rated voltage for collector/emitter: 50 V Overcurrent protection: 100 mA
Other	Self-test function

Cable length and mass: Input side: 70 cm (2.30 ft), Output side: 1.5 m (4.92 ft), Approx. 170 g (6.0 oz)



DIFFERENTIAL PROBE P9000 <small>(Accuracy guaranteed for 1 year)</small>	
Measurement modes	P9000-01: For waveform monitor output, Frequency characteristics: DC to 100 kHz -3 dB P9000-02: Switches between waveform monitor output/AC effective value output Wave mode frequency characteristics: DC to 100 kHz -3 dB, RMS mode frequency characteristics: 30 Hz to 10 kHz, Response time: Rise 300 ms, Fall 600 ms
Division ratio	Switches between 1000:1, 100:1
DC output accuracy	±0.5% f.s. (f.s. = 1.0 V, division ratio 1000:1), (f.s. = 3.5 V, division ratio 100:1)
Effective value measurement accuracy	±1% f.s. (30 Hz to less than 1 kHz, sine wave), ±3% f.s. (1 kHz to 10 kHz, sine wave)
Input resistance/capacity	H-L: 10.5 MΩ, 5 pF or less (At 100 kHz)
Maximum input voltage	1000 V AC, DC
Maximum rated voltage to ground	1000 V AC, DC (CAT III)
Operating temperature range	-40°C to 80°C (-40°F to 176°F)
Power supply	(1) AC adapter Z1008 (100 to 240 V AC, 50/60 Hz), 6 VA (including AC adapter), 0.9 VA (main unit only) (2) USB bus power (5 V DC, USB micro-B connector), 0.8 VA (3) External power source 2.7 V to 15 V DC, 1 VA
Accessories	Instruction manual ×1, Alligator clip ×2, Carrying case ×1

Cable length and mass: Main unit cable 1.3 m (4.27 ft), input section cable 46 cm (1.51 ft), approx. 350 g (12.3 oz)



DIFFERENTIAL PROBE 9322 <small>(Accuracy guaranteed for 1 year)</small>	
Measurement functions	DC mode: Waveform monitor output, DC to 10 MHz ±3 dB AC mode: Detection of power line surge noise, 1 kHz to 10 MHz ±3 dB (Low frequency cut-off frequency 1 kHz ±300 Hz) RMS mode: Rectified RMS output of DC and AC voltages, DC, 40 Hz to 100 kHz, Response speed: 200 ms or less (400 V AC)
Max. allowable input	2000 V DC, 1000 V AC
Max. rated voltage to earth	When using the Grabber Clip L9243: 1000 V AC/DC (CAT II) When using alligator clip: 1000 V AC/DC (CAT II), 600 V AC/DC (CAT III)
Output	Voltage division ratio: 1/1000, BNC terminal (DC/AC/RMS 3-mode selectable output)
DC amplitude accuracy	±1 % f.s. (1000 V DC or less), ±3 % f.s. (2000 V DC or less) (f.s.=2000 V DC)
RMS amplitude accuracy	±1 % f.s. (DC, 40 Hz to 1 kHz), ±4 % f.s. (1 kHz to 100 kHz) (f.s.=1000 V AC)
Input resistance, capacity	H-L: 9 MΩ, approx 10 pF (C at 100 kHz) H-case, L-case: 4.5 MΩ, approx 20 pF (C at 100 kHz)
Power supply	+5 V to +12 V, less than 300 mA (DC jack OD 5.5 mm [0.22 in], ID 2.1 mm [0.08 in]) - Via AC Adapter 9418-15 - Via MR6000 dedicated Probe Power Unit Z5021 through Power Cord 9248 - Via Logic terminal on Memory HiCorder through Power Cord 9324 (*1) - Via sensor terminal of F/V Unit 8940 (*1) through Power Cord 9325 (*1) - Via DC power output terminal attached to the input unit for the 8855 through Power Cord 9328 (*1) - Via the 8860 series dedicated Probe Power Unit 9687 (*1) through Power Cord 9248
Dimensions and mass	70 mm (2.76 in)W × 150 mm (5.91 in)H × 25 mm (0.98 in)D, 350 g (12.3 oz), Cord length: Input 46 cm (1.51 ft), Output 1.3 m (4.27 ft)
Included accessories	Alligator clips ×1 (red/black set), Grabber Clip L9243 ×1 (red/black set), Carrying case C0203 ×1, Instruction manual ×1

Cable length and mass: Main unit cable 1.5 m (4.92 ft), input section cable 30 cm (0.98 ft), approx. 150 g (5.3 oz)  
Note: The unit-side plug of the 9320-01 and 9327 is different from the 9320.



LOGIC PROBE 9320-01/9327	
Functions	Detection of voltage signal or relay contact signal for High/Low state recording
Input	4 channels (common ground between unit and channels), digital/contact input, switchable (contact input can detect open-collector signals) Input resistance: 1 MΩ (with digital input, 0 to +5 V) 500 kΩ or more (with digital input, +5 to +50 V) Pull-up resistance: 2 kΩ (contact input: internally pulled up to +5 V)
Digital input threshold	1.4 V / 2.5 V / 4.0 V
Contact input detection resistance	1.4 V: 1.5 kΩ or higher (open) and 500 Ω or lower (short) 2.5 V: 3.5 kΩ or higher (open) and 1.5 kΩ or lower (short) 4.0 V: 25 kΩ or higher (open) and 8 kΩ or lower (short)
Detectable pulse width	9320-01: 500 ns or longer, 9327: 100 ns or longer
Maximum input voltage	0 to +50 V DC (the maximum voltage that can be applied across input pins without damage)

Cable length and mass: Main unit cable 1.5 m (4.92 ft), input section cable 1 m (3.28 ft), approx. 320 g (11.3 oz)  
Note: The unit-side plug of the MR9321-01 is different from the MR9321.



LOGIC PROBE MR9321-01	
Functions	Detection of AC or DC relay drive signal for High/Low state recording Can also be used for power line interruption detection
Input	4 channels (isolated between unit and channels), HIGH/LOW range switching Input resistance: 100 kΩ or higher (HIGH range), 30 kΩ or higher (LOW range)
Output (H) detection	170 to 250 V AC, ±DC 70 to 250 V (HIGH range) 60 to 150 V AC, ±DC 20 to 150 V (LOW range)
Output (L) detection	0 to 30 V AC, ±DC 0 to 43 V (HIGH range) 0 to 10 V AC, ±DC 0 to 15 V (LOW range)
Response time	Rising edge 1 ms max., falling edge 3 ms max. (with HIGH range at 200 V DC, LOW range at 100 V DC)
Maximum input voltage	250 V rms (HIGH range), 150 V rms (LOW range) (the maximum voltage that can be applied across input pins without damage)


# More Functional Details

## Frequency area data analysis (FFT function)

Electrical distortion analysis/mechanical vibration analysis

### FFT analysis function

This function comprises single-signal FFT for tasks such as frequency component analysis, dual-signal FFT for transfer function analysis, and octave analysis for acoustic measurements. The signal source for analysis are selectable from 1,000 to 10,000 data points.

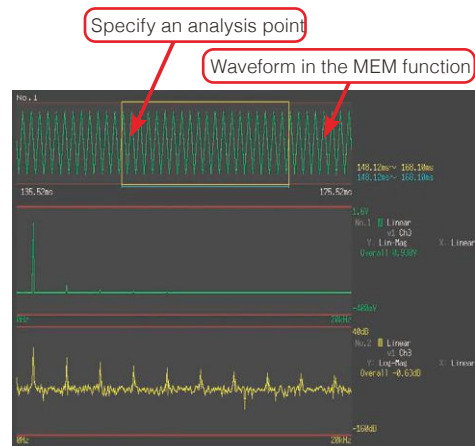

## HTTP/FTP server function


A 100BASE-TX LAN port is built in as standard equipment.

<HTTP server capability>

Access the unit via a web browser running on a computer, for waveform observation and remote operation. Waveform data of the MR8740/MR8741 series can also be downloaded and pasted onto Excel.

<FTP server capability>


Copy the memory contents of the MR8740/MR8741 (USB memory, internal RAM) to a computer.

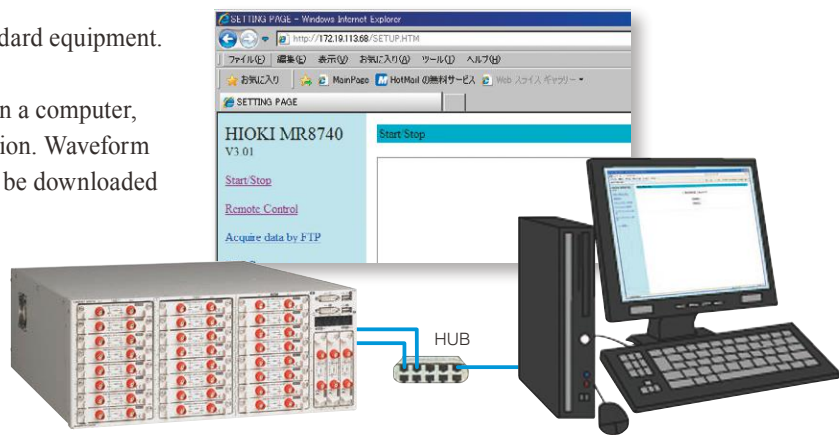

## Analyzing data on a computer


### ● WAVE PROCESSOR 9335 (option)

- Waveform display and calculation
- Print function




### ● LAN COMMUNICATOR 9333 (option)

- Collect waveform data
- Remotely control Memory HiCorders with a PC
- Save data in CSV format and export to spreadsheet applications



### ● Wave Viewer (Wv) Software (bundled software)

- Confirmation of binary data waveforms on a computer
- Saving data in the CSV format for transfer to spreadsheet software



#### ■ 9335 Outline specifications (option)

Operating environment	Computer running under Windows 10/8/7 (32/64-bit)
Functions	<ul style="list-style-type: none"> <li>• Display: Waveform display, X-Y display, cursor function, etc.</li> <li>• File loading: Readable data formats (MEM, .REC, .RMS, .POW) Largest readable file: Largest file that can be saved by supported instruments (Supported file size may be limited due to computer's operating environment.)</li> <li>• Data conversion: Conversion to CSV format, batch conversion of multiple files</li> </ul>
Print	<ul style="list-style-type: none"> <li>• Print function: Saving of print image files (with support for enhanced metafile [EMF] format)</li> <li>• Print format: Select from no tiling, 2 to 16 tiles, 2 to 16 rows, X/Y 1 to 4 tiles, preview/hard copy</li> </ul>

#### ■ 9333 Outline specifications (option)

Supported units	MR8740 (ver 3.12 or later), MR8741 (ver 2.12 or later) and similar products
Operating environment	Computer running under Windows 10/8/7 (32/64-bit), Vista (32-bit), XP Note: 9333 Ver.1.09 or later
Functions	<ul style="list-style-type: none"> <li>• Auto-saves waveform data to PC. Remote control of Memory HiCorder (by sending key codes and receiving images on screen), print reports, print images from the screen, receive waveform data in same format as waveform files from the Memory HiCorder (binary only)</li> <li>• Waveform data acquisition: Accept auto-saves from the Memory HiCorder, same format as auto-save files of Memory HiCorder (binary only), print automatically with a Memory HiCorder from a PC. The Memory HiCorder's print key launches printouts on the PC</li> <li>• Waveform viewer: Simple display of waveform files, conversion to CSV format, or other</li> </ul>

#### ■ Wave Viewer (Wv) Outline specifications (bundled software)

Operating environment	Windows 10/8/7 (32/64-bit)
Functions	<ul style="list-style-type: none"> <li>• Simple display of waveform file</li> <li>• Convert binary data file to text format, CSV</li> <li>• Scroll display, enlarge/reduce, jump to cursor/trigger position, etc.</li> </ul>

# Specifications

Basic specifications (Accuracy guaranteed for 1 year)	
Measurement functions	MEMORY (high-speed recording, X-Y), RECORDER (real-time recording), FFT (frequency analysis) (Recorder functionality scheduled to be available by the end of 2012.)
Max. Number of channels	MR8740: [Block I] 32 ch analog + 8 ch logic, or 29 ch analog + 56 ch logic (when used with built-in logic input + plug-in logic unit 8973 × 3) [Block II] 22 ch analog + 8 ch logic, or 19 ch analog + 56 ch logic (when used with built-in logic input + plug-in logic unit 8973 × 3) MR8741: 16 ch analog + 16 ch logic, or 10 ch analog + 64 ch logic (when used with built-in logic input + plug-in logic unit 8973 × 3)
Number of slots	MR8740: [Block I] 16 slots (Max. 16) [Block II] 11 slots (Max. 11) [Limitation on number of slots] when using the Current Unit 8971: Max. 4, When using the Logic Unit 8973: [Block I] Max. 3; cannot use slots 9 to 16 [Block II] Max. 3; cannot use slots 9 to 11 MR8741: 8 slots (Max. 8) [Limitation on number of slots] cannot use Current Unit 8971 When using the Logic Unit 8973: Max. 3
Number of logic channels	MR8740: [Block I] 8 ch logic (Logic probe terminal GND share a common GND with chassis.) [Block II] 8 ch logic (Logic probe terminal GND share a common GND with chassis.) [Limitation on using built-in logic input] applies to both Block I and Block II (with logic measurement ON) - Measurement resolution on slots 1 and 2 is limited up to 12 bits - Cannot use Frequency Unit 8970 on slots 1 and 2 - When using the DVM Unit MR8990 on slots 1 or 2: cannot use built-in logic input MR8741: 16 ch logic (Logic probe terminal GND share a common GND with chassis.) on condition that DVM Unit MR8990 is used on slots 1 and 2, cannot use built-in logic input [Limitation on using built-in logic input] (with logic measurement ON) • Measurement resolution on slots 1 and 2 is limited up to 12 bits • Cannot use Frequency Unit 8970 on slots 1 and 2
Maximum sampling rate	20 MS/second (50 ns period, all channels simultaneously) External sampling (10 MS/second, 100 ns period)
Internal memory	MR8740: Block I; Total 512 M-words (16MW/ch) Block II; Total 352 M-words (16MW/ch) MR8741: Total 256 M-words (16MW/ch)
Data storage media	USB memory stick (USB 2.0)
Backup functions (At 25°C/ 77°F)	Clock and parameter setting backup: at least 10 years Waveform backup function: none
External control connectors (MR8741 only)	Terminal block: External trigger input, Trigger output, External sampling input, Two external outputs (GO/NG output), Three external inputs (start, stop, save)
External interfaces	LAN: 100BASE-TX (DHCP, DNS supported, FTP server, HTTP server) USB: USB2.0 compliant, series A receptacle ×2
Environmental conditions (No condensation)	Operation: 0°C (32°F) to 40°C (104°F), 20% to 80% rh Storage: -10°C (14°F) to 50°C (122°F), 90% rh or less
Compliance standard	Safety: EN 61010 EMC: EN 61326 Class A
Power supply	100 to 240 V AC, 50/60 Hz
Power consumption	MR8740: 250 VA, MR8741: 120 VA
Dimensions and mass (main unit only)	MR8740: Approx. 426 mm (16.77 in) W × 177 mm (6.97 in) H × 505 mm (19.88 in) D, 10.8 kg (381.0 oz) MR8741: Approx. 350 mm (13.78 in) W × 160 mm (6.30 in) H × 320 mm (12.60 in) D, 5.4 kg (190.5 oz)
Supplied accessories	Instruction Manual × 1, Application Disk (Wave Viewer Wv, Communication Commands table) × 1, Power cord × 1, rack-mounting hardware (EIA standard) × 1set (MR8740 only)

## MEMORY (high-speed recording)

Time axis	5 μs/div	10 μs/div	20 μs/div	50 μs/div	100 μs/div	200 μs/div	500 μs/div	1 ms/div	2 ms/div	5 ms/div	10 ms/div	20 ms/div	50 ms/div
Sampling period	50 ns	100 ns	200 ns	500 ns	1 μs	2 μs	5 μs	10 μs	20 μs	50 μs	100 μs	200 μs	500 μs
Recording Time	0.8 s	1.6 s	3.2 s	8 s	16 s	32 s	1 min 20 s	2 min 40 s	5 min 20 s	13 min 20 s	26 min 40 s	53 min 20 s	2 h 13 min 20 s

Time axis	100 ms/div	200ms/div	500ms/div	1s/div	2s/div	5s/div	10s/div	30s/div	50s/div	1min/div	100s/div	2min/div	5min/div
Sampling period	1 ms	2ms	5ms	10ms	20ms	50ms	100ms	300ms	500ms	600ms	1.0s	1.2s	3.0s
Recording Time	4 h 26 min 40 s	8 h 53 min 20 s	22 h 13 min 20 s	1 d 20 h 26 min 40 s	3 d 16 h 53 min 20 s	9 d 06 h 13 min 20 s	18 d 12 h 06 min 40 s	55 d 13 h 20 min 00 s	92 d 14 h 13 min 20 s	111 d 02 h 40 min 00 s	185 d 04 h 26 min 40 s	222 d 05 h 20 min 00 s	555 d 13 h 20 min 00 s

RECORDER (real-time recording)	
Time axis	10 ms to 1 hour/div, 19 ranges, time axis resolution 100 points/div <i>Note: Out of data acquired at selected sampling rate, only maximum and minimum value data determined using 100 points/div units are stored. Time axis compression selectable in 13 steps, from × 1/2 to × 1/20,000</i>
Sampling rate	1/10/100 μs 1/10/100 ms (selectable from 1/100 or less of time axis)
Recording length	Built-in presets of 25 - 50,000 div, or "Continuous" or arbitrary setting in 1-div steps (max. 80,000 div)
Waveform memory	Store data for most recent 80,000 div in memory
Auto save	Data is automatically saved in USB memory stick after measurement stops

Trigger functions	
Trigger mode	MEMORY (high-speed recording), FFT: Single, Repeat, Auto RECORDER* (real-time recording): Single, Repeat
Trigger sources	CH1 to CH16 (analog), Standard Logic 16ch + Logic Unit (Max. 3 units 48 channels), External, Timer, Manual (either ON or OFF for each source), Logical AND/OR of sources
Trigger types	<ul style="list-style-type: none"> <li>• <b>Level:</b> Triggering occurs when preset voltage level is crossed (upwards or downwards)</li> <li>• <b>Voltage drop:</b> Triggering occurs when voltage drops below peak voltage setting (for 50/60 Hz AC power lines only)</li> <li>• <b>Window:</b> Triggering occurs when window defined by upper and lower limit is entered or exited</li> <li>• <b>Period:</b> Rising edge or falling edge cycle of preset voltage value is monitored and triggering occurs when defined cycle range is exceeded</li> <li>• <b>Glitch:</b> Triggering occurs when pulse width from rising or falling edge of preset voltage value is under run</li> <li>• <b>Event setting:</b> Event count is performed for each source, and triggering occurs when a preset count is exceeded</li> <li>• <b>Logic:</b> 1, 0, or ×, Pattern setting</li> </ul>
Level setting resolution	0.1% of full scale (full scale = 20 divisions)
Trigger filter	Selectable 0.1div to 10.0div, or OFF (at MEMORY function) ON (10ms fixed) or OFF (at RECORDER function*)
Trigger output (MR8741 only)	Open collector (5 voltage output, active Low) At Level setting: pulse width (Sampling period × data number after trigger) At Pulse setting: pulse width (2ms)
Other functions	Trigger priority (OFF/ON), Pre-trigger function for capturing data from before / after trigger event (at MEMORY function), Level display during trigger standby, Start and stop trigger (At RECORDER function*), Trigger search function

FFT	
Analysis mode	Storage waveform, Linear spectrum, RMS spectrum, Power spectrum, Density of power spectrum, Cross power spectrum, Auto-correlation function, Histogram, Transfer function, Crosscorrelation function, Impulse response, Coherence function, 1/1 Octave analysis, 1/3 Octave analysis, LPC analysis, Phase spectrum
Analysis channels	Selectable from all analog input channels
Frequency range	133 mHz to 8 MHz, External, (resolution 1/400, 1/800, 1/2000, 1/4000)
Number of sampling points	1000, 2000, 5000, 10000 points
Window functions	Rectangular, Hanning, Hamming, Blackman, Blackman-Harris, Flattop, Exponential
Display format	Single, Dual, Nyquist, Running spectrum
Averaging function	Time axis / frequency axis simple averaging, Exponential averaging, Peak hold (frequency axis), Averaging times: 2 times to 10,000 times

Other functions	
Waveform judgment function (In MEMORY or FFT function) (MR8741 only)	<ul style="list-style-type: none"> <li>• Area comparison with reference waveform area for time domain waveform, X-Y waveform, or FFT analysis waveform</li> <li>• Parameter calculated value comparison with reference value</li> <li>• Output: GO/NG decision, Open-collector 5V</li> </ul> <i>Note: Judge waveforms in near-real-time at samplings speeds of 100msec/div (1ms sampling) or slower.</i>

## Maximum Recording Time for the internal memory (At MEMORY Function)

Time axis	5 μs/div	10 μs/div	20 μs/div	50 μs/div	100 μs/div	200 μs/div	500 μs/div	1 ms/div	2 ms/div	5 ms/div	10 ms/div	20 ms/div	50 ms/div
Sampling period	50 ns	100 ns	200 ns	500 ns	1 μs	2 μs	5 μs	10 μs	20 μs	50 μs	100 μs	200 μs	500 μs
Recording Time	0.8 s	1.6 s	3.2 s	8 s	16 s	32 s	1 min 20 s	2 min 40 s	5 min 20 s	13 min 20 s	26 min 40 s	53 min 20 s	2 h 13 min 20 s

Time axis	100 ms/div	200ms/div	500ms/div	1s/div	2s/div	5s/div	10s/div	30s/div	50s/div	1min/div	100s/div	2min/div	5min/div
Sampling period	1 ms	2ms	5ms	10ms	20ms	50ms	100ms	300ms	500ms	600ms	1.0s	1.2s	3.0s
Recording Time	4 h 26 min 40 s	8 h 53 min 20 s	22 h 13 min 20 s	1 d 20 h 26 min 40 s	3 d 16 h 53 min 20 s	9 d 06 h 13 min 20 s	18 d 12 h 06 min 40 s	55 d 13 h 20 min 00 s	92 d 14 h 13 min 20 s	111 d 02 h 40 min 00 s	185 d 04 h 26 min 40 s	222 d 05 h 20 min 00 s	555 d 13 h 20 min 00 s

# MR8741, MR8740 Options in Detail

\*Input cords are not included. Please purchase them separately.  
 \*The 8971 use up to 4 with MR8740; not compatible with MR8741. When using the 9709 or the CT6865 with Current Unit 8971, a total of 7 current probes can be used.

Input modules

- ANALOG UNIT 8966**  
2 ch, Voltage input, DC to 5 MHz bandwidth
- TEMP UNIT 8967**  
2 ch, thermocouple temperature input
- HIGH RESOLUTION UNIT 8968**  
2 ch, voltage input, DC to 100 kHz bandwidth
- STRAIN UNIT U8969**  
2 ch, strain gauge type converter amp  
\*Includes Conversion Cable L9769
- FREQ UNIT 8970**  
2 ch, for measurement of frequency, rpm, pulse, etc.
- CURRENT UNIT 8971**  
2 ch, for measuring current using dedicated current sensors, bundled two Conversion cable 9318  
\* The Current unit 8971 up to four module
- DC/RMS UNIT 8972**  
2 ch, voltage/DC to 400 kHz, RMS rectifier, DC and 30 to 100 kHz bandwidth
- LOGIC UNIT 8973**  
4 terminals, 16 ch
- DIGITAL VOLTMETER UNIT MR8990**  
2 ch, high-precision DC V input, 0.1 μV resolution, high-speed sampling 500 times/s
- HIGH VOLTAGE UNIT U8974**  
2ch, voltage input, max. 1000 V DC and 700 V AC
- CHARGE UNIT U8979**  
2 ch, for acceleration measurement, supports charge output, pre-amp output (IPEPE type), and voltage output



Storage media

Use only CF Cards or USB drive sold by HIOKI. Compatibility and performance are not guaranteed for CF cards/USB memory stick made by other manufacturers. You may be unable to read from or save data to such cards.  
**USB DRIVE Z4006**  
16 GB, Long-life, High-reliability SLC Flash Memory

Input cord (D)

- \* Voltage to ground is within this product's specifications, separate power source is also required.
- DIFFERENTIAL PROBE P9000-01**  
Waveform only, up to 1 kV AC/DC, band width up to 100kHz
  - DIFFERENTIAL PROBE P9000-02**  
Waveform/RMS value switchable, up to 1 kV AC/DC, band width up to 100kHz
  - AC ADAPTER Z1008**  
100 to 240 V AC

Input cable (E)

- \*Voltage to ground is within this product's specifications. Separate power source is also required.
- DIFFERENTIAL PROBE 9322**  
For up to 1kV AC or 2kV DC, frequency band width up to 10MHz
  - AC ADAPTER 9418-15**  
100 to 240 V AC.

Output modules

- \* Input cords not included. Please purchase separately.
- WAVEFORM GENERATOR UNIT MR8790**  
4 ch, DC output ±10 V, Sign waveform output 1 Hz to 20 kHz
  - PULSE GENERATOR UNIT MR8791**  
8 ch, Pulse output 0.1 Hz to 20 kHz, Pattern output
  - ARBITRARY WAVEFORM GENERATOR UNIT U8793**  
2 ch, FG function 10 MHz to 100 kHz, Arbitrary waveform generator  
D/A refresh rate 2 MHz, Output 15 V

Input cable (F)

- \* Voltage input via banana terminals limited by the voltage specifications of the respective input unit.
- CONNECTION CABLE L4940**  
Banana plug - banana plug, 1.5 m (4.92 ft) length, red/black each 1
  - EXTENSION CABLE L4931**  
Expands the length of the cable with banana plug, 1.5 m (4.92 ft) length
  - ALLIGATOR CLIP L4935**  
Attaches to the tip of the banana plug cable, CAT IV 600V, CAT III 1000V
  - BUS BAR CLIP L4936**  
Attaches to the tip of the banana plug cable, CAT III 600V
  - MAGNETIC ADAPTER L4937**  
Attaches to the tip of the banana plug cable, CAT III 1000V
  - GRABBER CLIP L9243**  
Attaches to the tip of the connection cable, 185 mm (7.28 in) length, CAT II 1000 V

Output cable

- \* Please contact your local HIOKI distributor for connectors that support Model MR8791.
- CONNECTION CABLE L9795-01**  
SMB to alligator clip, 1.5 m (4.92 ft) length
  - CONNECTION CABLE L9795-02**  
SMB to BNC terminal, 1.5 m (4.92 ft) length

Input cable (G)

- \* For the MR8990 \*Voltage is limited to the specifications of the input modules in use.
- TEST LEAD L2200**  
70 cm (2.30 ft) length, detachable large alligator clips or needle tips are bundled, CAT IV 600V, CAT III 1000V

Input cable (A)

- \*Voltage is limited to the specifications of the input modules in use
- ALLIGATOR CLIP L9790-01**  
Red/black set attaches to the ends of the cables L9790
  - CONTACT PIN 9790-03**  
Red/black set attaches to the ends of the cables L9790
  - CONNECTION CORD L9790**  
Flexible φ 4.1 mm (0.16 in) thin dia., cable allowing for up to 600 V input, 1.8 m (5.91 ft) length  
\* The end clip is sold separately.
  - GRABBER CLIP 9790-02**  
Red/black set attaches to the ends of the cables L9790  
\* When this clip is attached to the end of the L9790, input is limited to CAT II 300 V. Red/black set.

Input cable (H)

- \*For the U8979 \*Voltage is limited to the specifications of the input modules in use
- CONNECTION CABLE 9166**  
BNC-clips, cable length: 1.5 m (4.92 ft)

Input cable (B)

- \*Voltage is limited to the specifications of the input modules in use
- CONNECTION CORD L9198**  
φ 5.0 mm (0.20 in) dia., cable allowing for up to 300 V input, 1.7 m (5.58 ft) length, small alligator clip
  - CONNECTION CORD L9197**  
φ 5.0 mm (0.20 in) dia., cable allowing for up to 600 V input, 1.8 m (5.91 ft) length, a detachable large alligator clips are bundled
  - GRABBER CLIP L9243**  
Attaches to the tip of the banana plug cable, CAT II 1000 V, 185 mm (7.28 in) length

Other options for input

- CONNECTION CORD L9217**  
Cord has insulated BNC connectors at both ends, for signal output, 1.6 m (5.25 ft) length
- CONVERSION ADAPTER 9199**  
Receiving side banana, output BNC terminal
- CONNECTION CORD 9165**  
Cord has metallic BNC connectors at both ends, use at metallic terminal, 1.5 m (4.92 ft) length
- CONVERSION CABLE 9318**  
To connect the CT6841-6846, CT6865(63, 9271/76/79, 9270/71/72 to the 8971/40/51, 38 cm (14.96 in) length

Input cord (C)

- \* This probe does not expand the maximum rated voltage above ground of an isolated input.
- 10:1 PROBE 9665**  
Note: This probe does not expand the maximum rated voltage above ground of an isolated input. Max. rated voltage to earth is same as for input module, max. input voltage 1 kV rms (up to 500 kHz), 1.5 m (4.92 ft) length
  - 100:1 PROBE 9666**  
Note: This probe does not expand the maximum rated voltage above ground of an isolated input. Max. rated voltage to earth is same as for input module, max. input voltage 5 kV peak (up to 1MHz), 1.5 m (4.92 ft) length

Logic signal measurement

- \* Only the small terminal types can be used. \* The 9323 is not required for the small-terminal types 9327, 9320-01, 9321-01 and MR9321-01.
- LOGIC PROBE 9327**  
4-channel type, for voltage/contact signal ON/OFF detection (response pulse width 100 ns or more, miniature terminal type)
  - LOGIC PROBE MR9321-01**  
4 isolated channels, ON/OFF detection of AC/DC voltage (miniature terminal type)
  - LOGIC PROBE 9320-01**  
4-channel type, for voltage/contact signal ON/OFF detection (response pulse width 500 ns or more, miniature terminal type)

PC Software

- WAVE PROCESSOR 9335**  
Convert data, print and display waveforms
- LAN COMMUNICATOR 9333**  
• Waveform data collect function  
• Remote control with the PC
- LAN CABLE 9642**  
Straight Ethernet cable, supplied with straight to cross conversion adapter, 5 m (16.41 ft) length

## Model : MEMORY HiCORDER MR874x

- Model No. (Order Code) (Note)
- MR8740** (Max. 54ch, 864MW memory, main unit only)
  - MR8741** (Max. 16ch, 256MW memory, main unit only)
- Main unit MR8740/MR8741 cannot operate alone. The 8971 use up to 4 with MR8740; not compatible with MR8741.

\*A separate power supply (CT1955) is required in order to use a high-precision current sensor.  
 \*Only sensors with ME15W (12-pin) terminals (-05 type) can be connected to the CT1955.  
 \*The separately available Conversion Cable CT1990 is required in order to use a sensor with PL23 (10-pin) terminal.

- POWER SUPPLY for Current Sensors**
- SENSOR UNIT CT9555 1ch, with Waveform output**
  - CONNECTION CORD L9217**  
Cord has insulated BNC connectors at both ends, 1.6 m (5.25 ft) length

- PL23 (10-pin) - ME15W (12-pin) conversion**
- CONVERSION CABLE CT9900**  
Convert PL23 (10-pin) terminal to ME15W (12-pin) terminal

- Up to 1000 A (High precision) \*ME15W (12-pin) terminal type**
- High-precision pull-through current sensors, observe waveforms from DC to distorted AC
  - AC/DC CURRENT SENSOR CT6875A**, 2 MHz, 500 A
  - AC/DC CURRENT SENSOR CT6876A**, 1.5 MHz, 1000 A
  - Observe waveforms from DC to distorted AC
  - AC/DC CURRENT PROBE CT6844A**, 500 kHz, 500 A
  - AC/DC CURRENT PROBE CT6845A**, 200 kHz, 500 A
  - AC/DC CURRENT PROBE CT6846A**, 100 kHz, 1000 A

\*The separately available Conversion Cable CT9901 (discontinued) is required in order to use a high-precision current sensor equipped with a ME15W (12-pin) terminal (-05 type) with the Current Measuring Module 8971 (which is designed for use with the MR8847, MR8827, and MR8740).  
 \*While the CT955x is not required in order to use a sensor equipped with a PL23 (10-pin) terminal with the 8971, the Conversion Cable 9318 (which comes with the 8971) is required for that setup.

- Direct connectable with the Current Sensor**
- CURRENT UNIT 8971** For the MR8847, MR8827, MR8740
  - CONVERSION CABLE 9318** For the CT6841/43 or other

### Precautions when connecting a high-precision current sensor to a Memory HiCorder

- Connecting to the MR8847A / MR8827 / MR8740
- High-precision current sensor (ME15W) + CT9901 (discontinued) + 9318 → CURRENT UNIT 8971
  - High-precision current sensor (ME15W) + CT955x + BNC cable → except CURRENT UNIT 8971
  - High-precision current sensor (PL23) + 9318 → CURRENT UNIT 8971
  - High-precision current sensor (PL23) + CT9900 + CT955x + BNC cable → except CURRENT UNIT 8971
- Connecting to the MR8741
- High-precision current sensor (ME15W) + CT955x + BNC cable → except CURRENT UNIT 8971
  - High-precision current sensor (PL23) + CT9900 + CT955x + BNC cable → except CURRENT UNIT 8971
- Note: CURRENT UNIT 8971 is not compatible with the MR8741

### Other current sensor types

The Memory HiCorder can be used with various types of current sensors and probes. For details, see product information on HioKI's website.

The CM7290 (available separately) is required in order to use these current sensors.

- 100 A to 2000 A (Medium speed)**
- AC/DC CURRENT SENSOR CT7631**, (Auto zero CT7731)  
DC, 1 Hz to 10 kHz (-3dB), 100 A, 1 mV/A output
  - AC/DC CURRENT SENSOR CT7636**, (Auto zero CT7736)  
DC, 1 Hz to 10 kHz (-3dB), 600 A, 1 mV/A output
  - AC/DC CURRENT SENSOR CT7642**, (Auto zero CT7742)  
DC, 1 Hz to 10 kHz (5 kHz), 2000 A, 1 mV/A output
  - DISPLAY UNIT CM7290**  
Provides measurement, display, and output functionality when used with the CT7000s.
  - OUTPUT CORD L9095**  
Connect to BNC terminal, 1.5 m (4.92 ft) length

- \*For reference only. Please purchase locally.
- Thermocouple**

Note: company names and product names appearing in this brochure are trademarks or registered trademarks of various companies.



**HIOKI E. E. CORPORATION**  
 HEADQUARTERS  
 81 Koizumi,  
 Ueda, Nagano 386-1192 Japan  
<https://www.hioki.com/>

